



- **Certified by authoritative organizations; meets cross-border export quality standards**
- **Fast cable bundling with full range of specifications**
- **Made from high-quality virgin nylon; environmentally friendly, flame-retardant, acid- and corrosion-resistant**

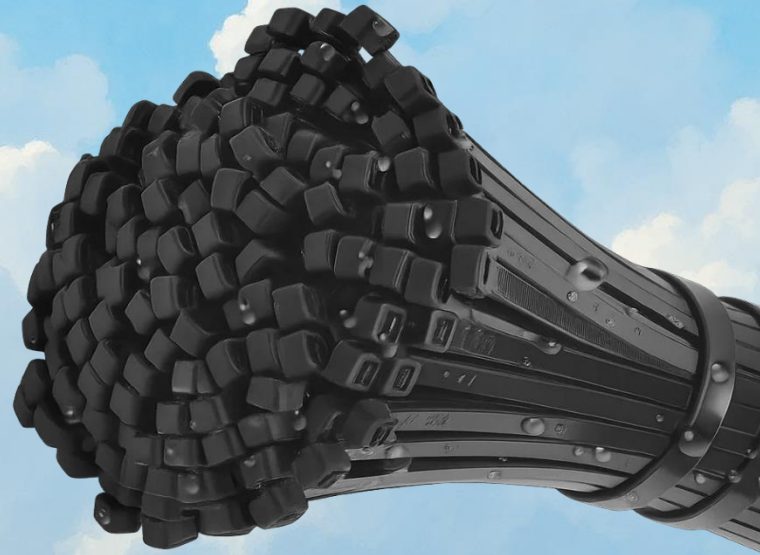

Self-Locking Nylon Cable Tie

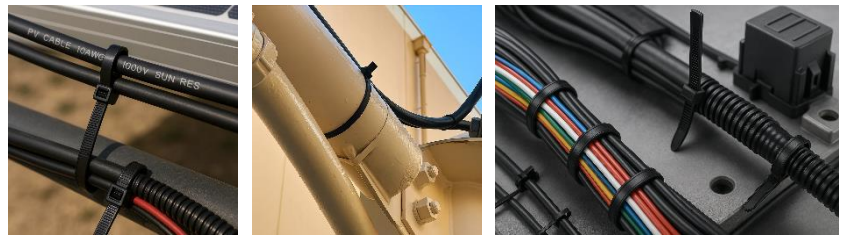

Key Features

- **Tensile strength up to ± 22 kg (for 4.8 mm width)**
- **Flame retardant rating: UL 94V-2**
- **Smooth, burr-free surface; one-piece molding with polished finish**
- **Reinforced locking head with anti-reverse function for stable and reliable performance**
- **Wide application and easy to use**
- **Operating temperature: -5°C to $+85^{\circ}\text{C}$**
- **Elongation strength: 104 kPa**

Specifications

Part No.	SPEC	Width (mm)	Selling Unit (pcs/pack)
NB9630	5×100mm	4.8	500
NB9631	5×120mm	4.8	500
NB9632	5×150mm	4.8	500
NB9633	5×160mm	4.8	250
NB9634	5×180mm	4.8	500
NB9635	5×200mm	4.8	500
NB9636	5×250mm	4.8	250
NB9637	5×280mm	4.8	250
NB9638	5×300mm	4.8	250
NB9639	5×350mm	4.8	250
NB9640	5×380mm	4.8	250
NB9641	5×400mm	4.8	250
NB9642	5×450mm	4.8	250
NB9643	5×500mm	4.8	250
NB9644	5×550mm	4.8	250
NB9645	5×600mm	4.8	250
NB9646	5×650mm	4.8	250